

Features

- Low Profile, Stable Color
- 4 Leads
- Water Clear Lens
- InGaN / AlInGaP Technology
- Solid State Reliability
- Special Packaging Available Upon Request

Description

The INP-5A4X120.X series is a high brightness Piranha LED. It is 4 leads through-hole type LED which can be used in various applications.

Applications

- Consumer Electronics
- Variable Message Signs (VMS)
- Automobile After Market
- Industrial Equipment
- Advertising Signs

Package Dimensions in mm

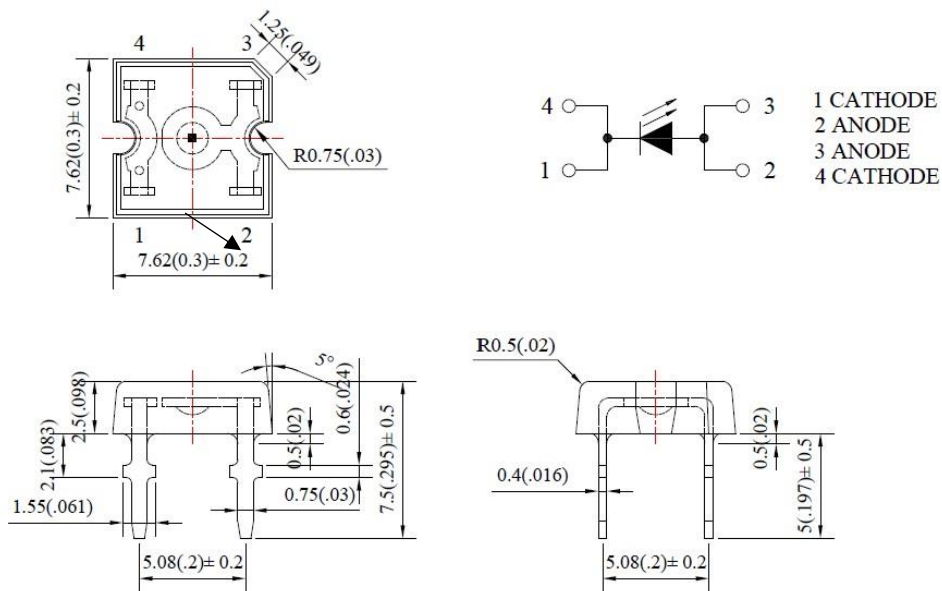


Figure 1. INP-5A4X120.X series Package Dimensions

Notes

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
3. Protruded resin under flange is 1.00 mm (.039") max.
4. Specifications are subject to change without notice.

Absolute Maximum Rating at 25°C (Note)

Product	Emission Color	P _d (mW)	I _F (mA)	I _{FP} * (mA)	V _R (V)	T _{OP} (°C)	T _{ST} (°C)
INP-5A4Y120	Yellow	120	50	100	5	-40°C~+80°C	-40°C~+85°C
INP-5A4A120	Amber	150					
INP-5A4R120	Red						
INP-5A4C120	Cyan	180	50	100			
INP-5A4G120	Green						
INP-5A4B120.X	Blue						
INP-5A4W130.65	Cool White						

Notes

1. Derate linearly as shown in derating curve.
2. Duty Factor = 10%, Frequency = 1 kHz.

Electrical Characteristics $T_A = 25^\circ\text{C}$ (Note)

Product	Emission Color	$I_F(\text{mA})$	$V_F(\text{V})$		$\lambda(\text{nm})$			Viewing Angle	$I_V(\text{mcd})$	
			min	max	λ_D	λ_P	$\Delta\lambda$	$2\theta_{1/2}$	min	typ.
INP-5A4Y120	Yellow	20	1.6	2.4	590	592	15	120	250	500
INP-5A4A120	Amber	20	1.6	2.6	605	610	20	120	250	500
INP-5A4R120	Red	20	1.6	2.6	624	632	20	120	250	500
INP-5A4C120	Cyan	20	2.6	3.6	505	495	35	120	450	700
INP-5A4G120	Green	20	2.6	3.6	525	520	35	120	450	800
INP-5A4B120	Blue	20	2.6	3.6	470	468	25	120	120	220
INP-5A4W130.65	Cool White	20	2.8	3.6	6500K ($X = 0.31, Y = 0.32$)			130	600	1000

Notes

1. Performance guaranteed only under conditions listed in above tables.
2. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
3. $2\theta_{1/2}$ is the o-axis angle where the luminous intensity is 1/2 the peak intensity.
4. The dominant wavelength (λ_D) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

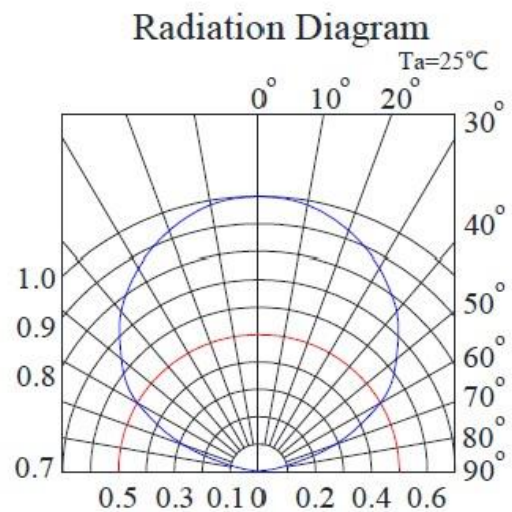
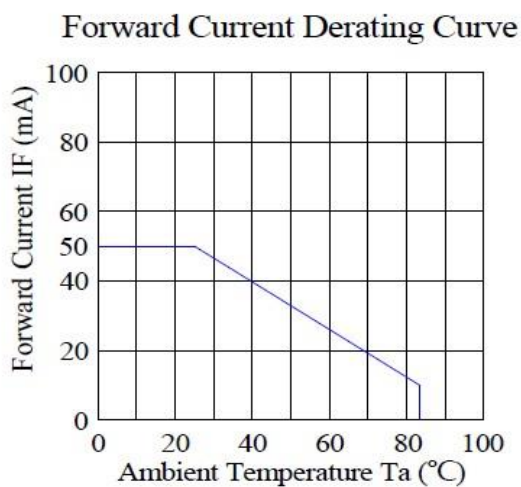
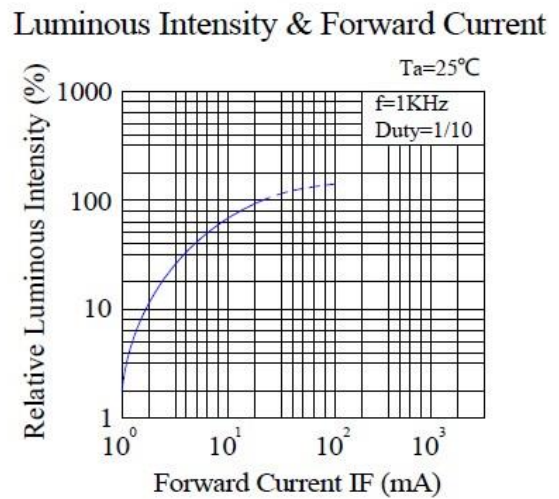
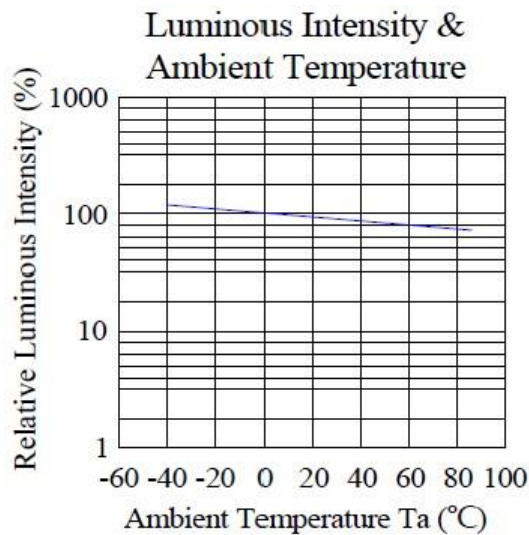
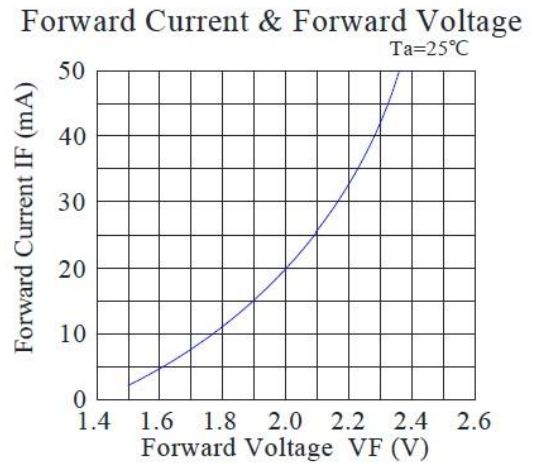
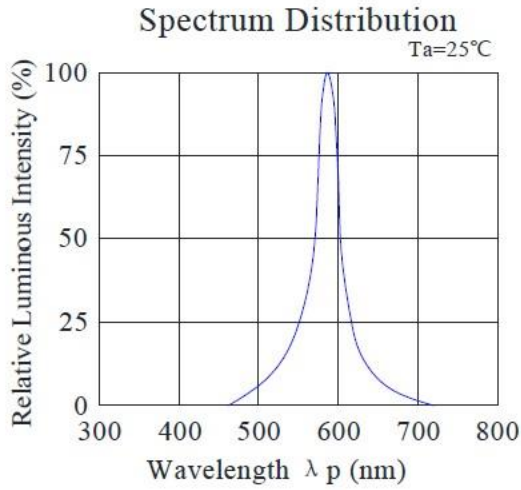
ESD Precaution

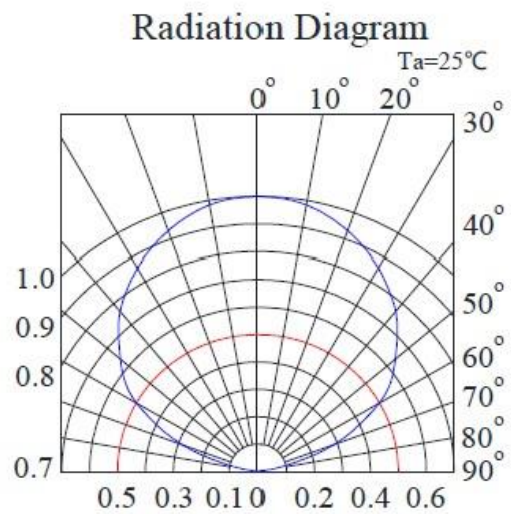
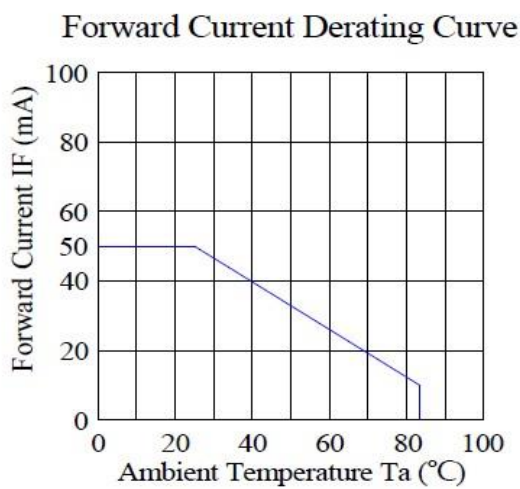
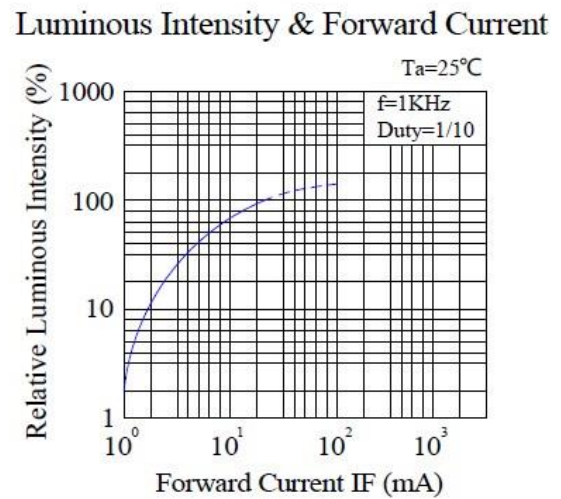
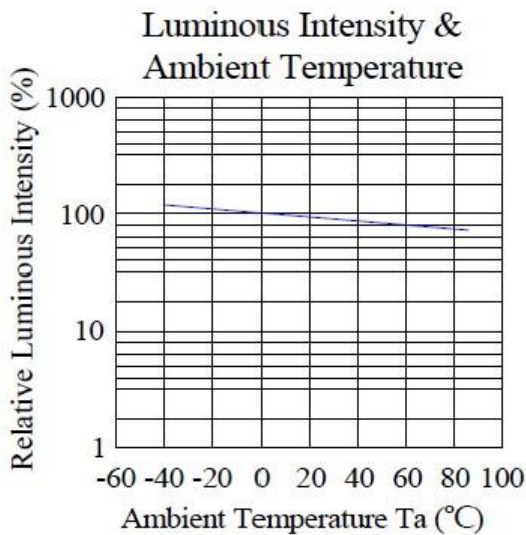
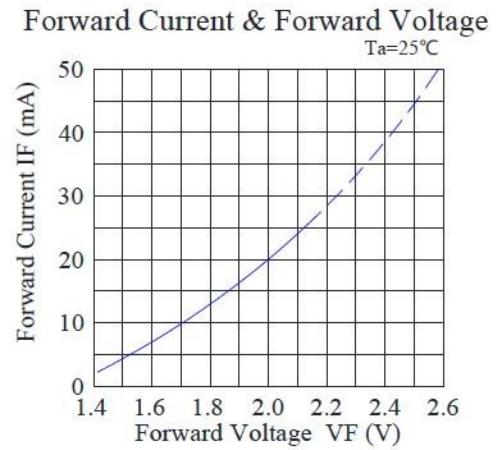
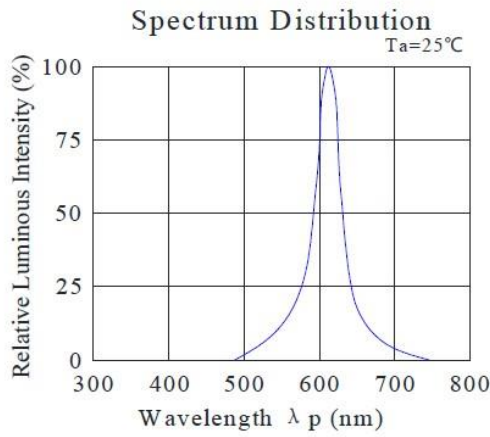
ATTENTION: Electrostatic Discharge (ESD) protection

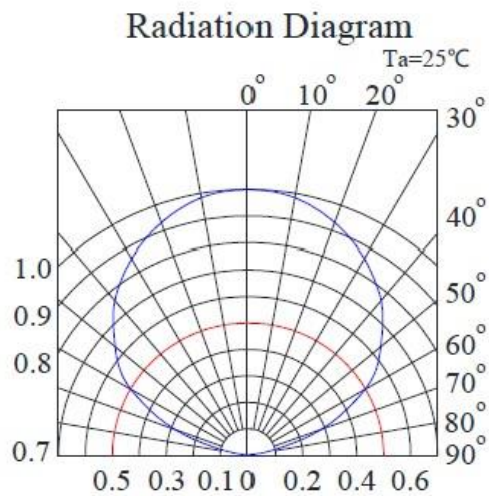
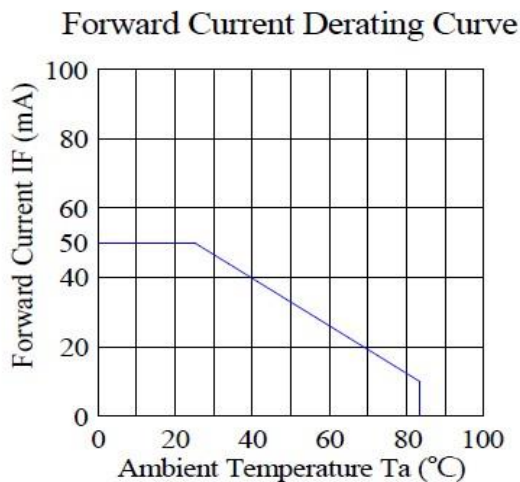
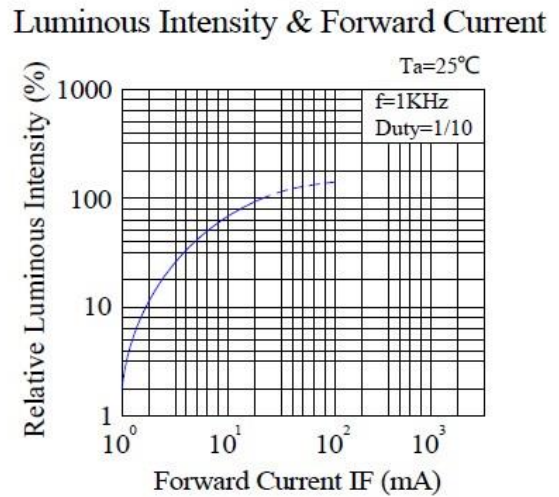
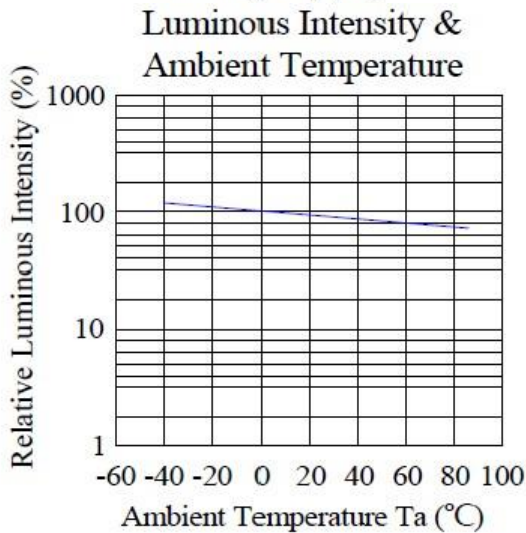
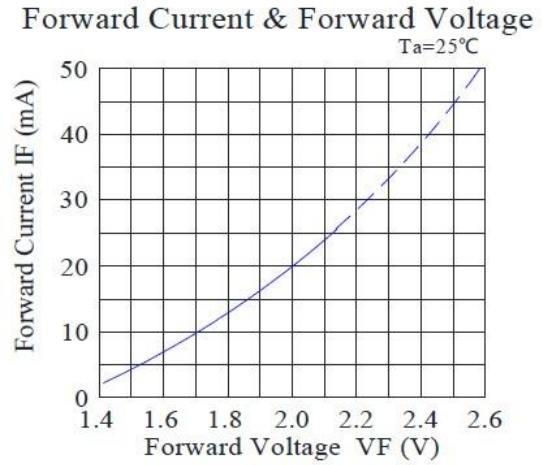
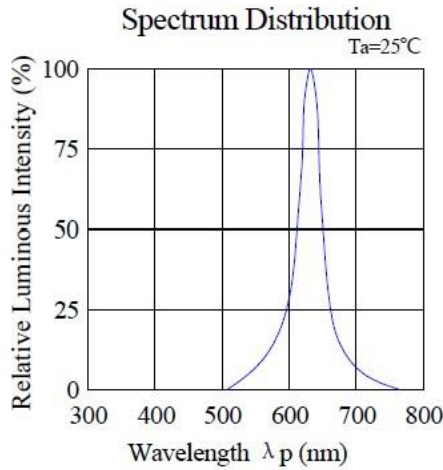


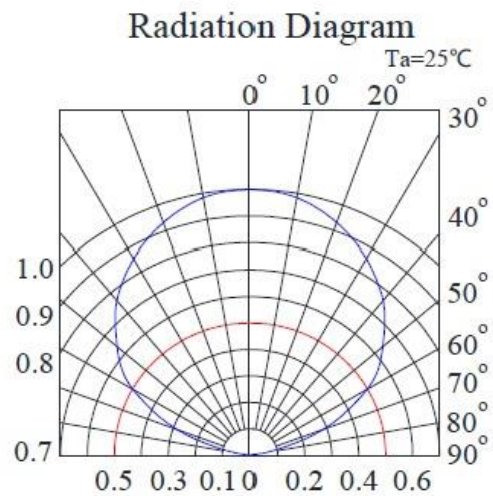
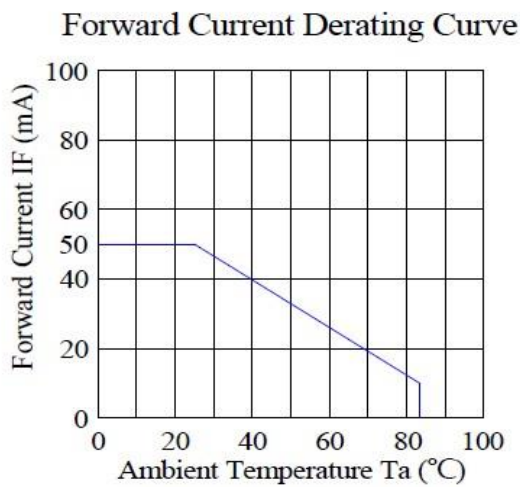
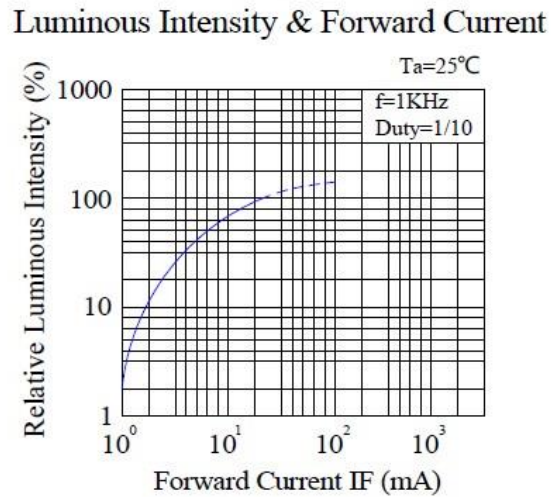
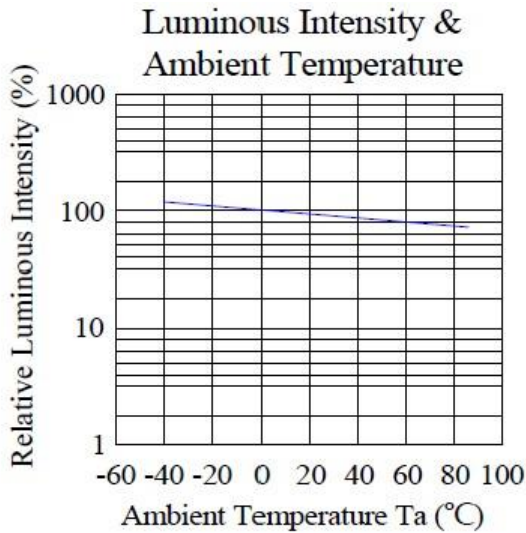
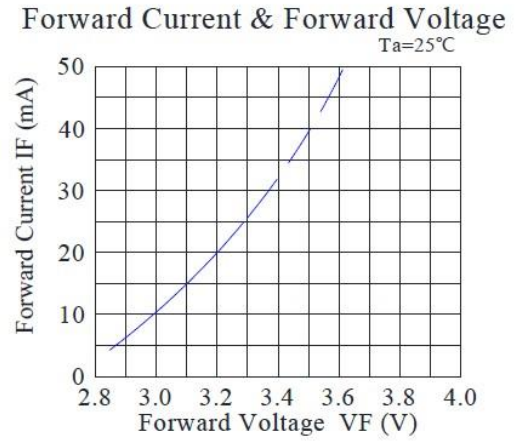
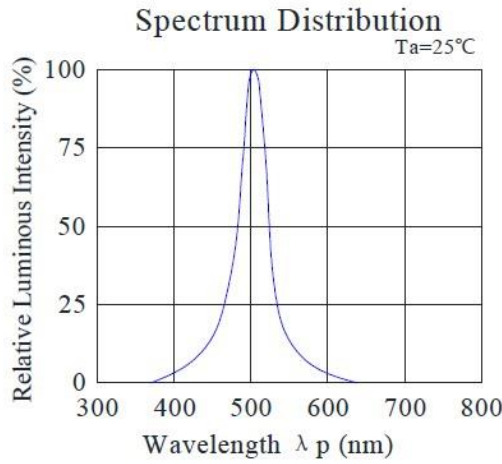
The symbol above denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are STATIC SENSITIVE devices. ESD precaution must be taken during design and assembly. If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

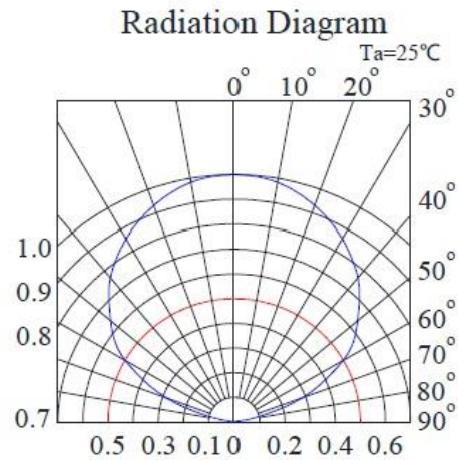
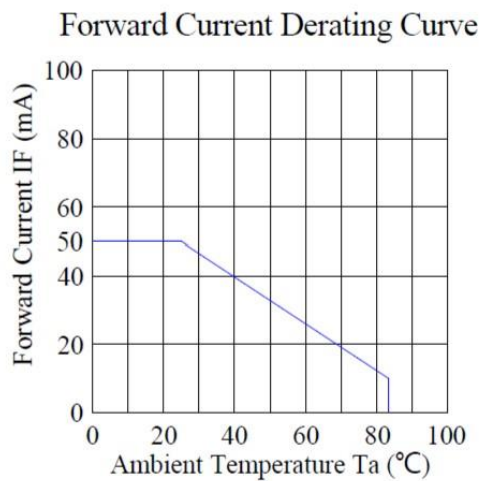
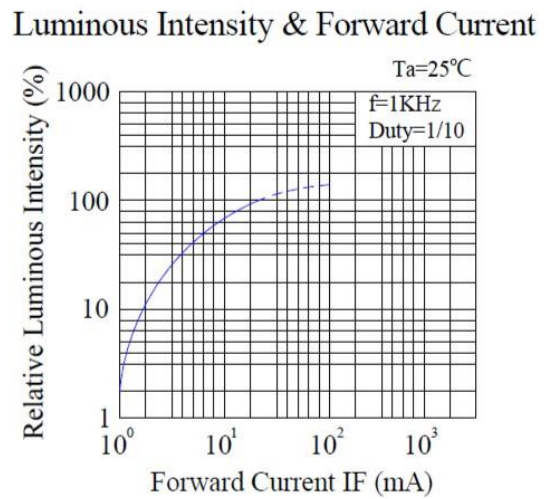
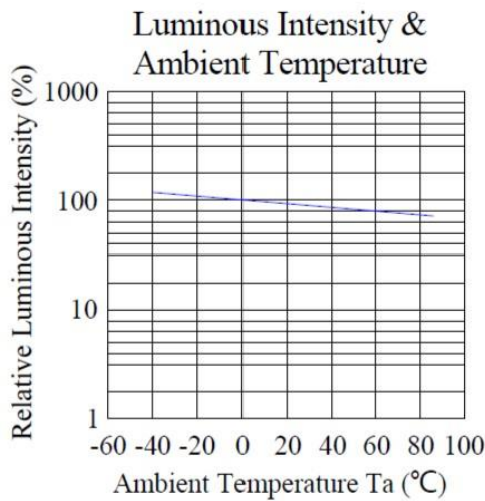
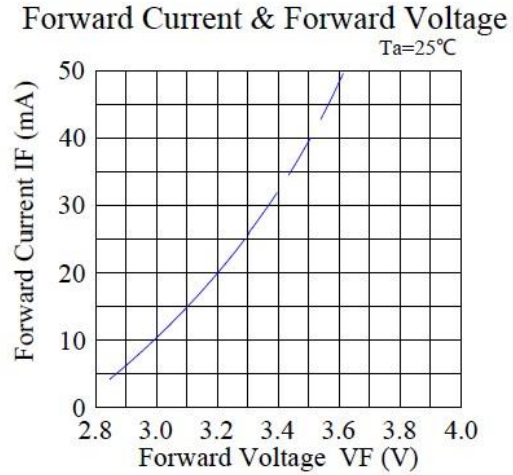
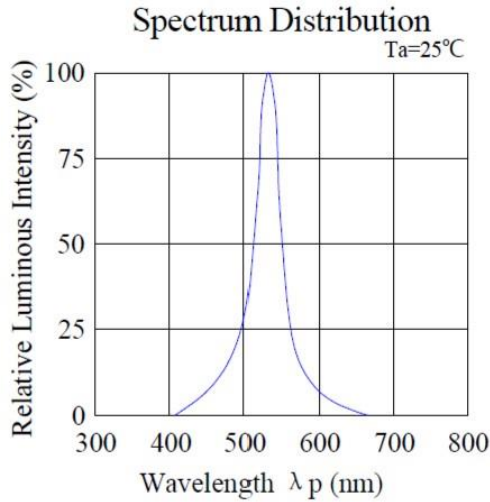
Please be advised that normal static precautions should be taken in the handling and assembly of this device to prevent damage or degradation which may be induced by electrostatic discharge (ESD)

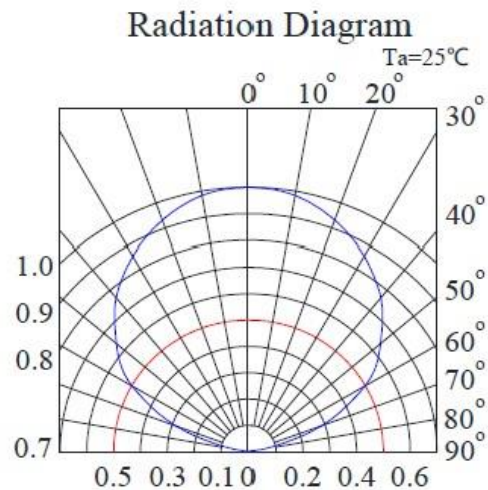
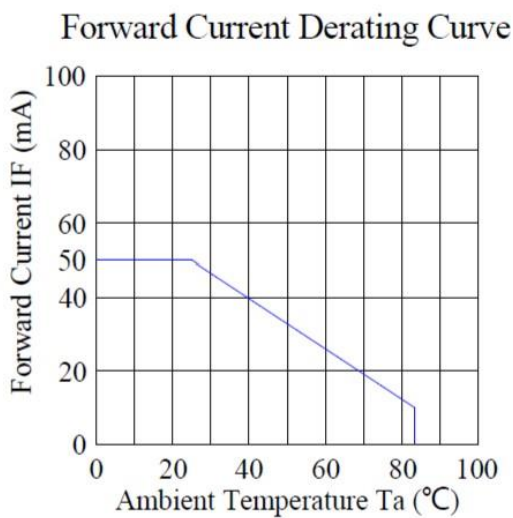
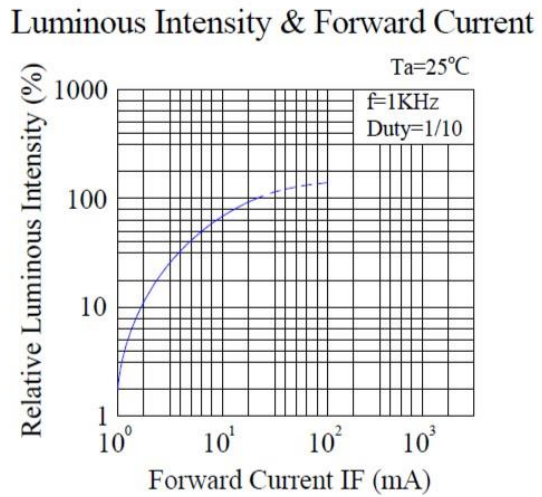
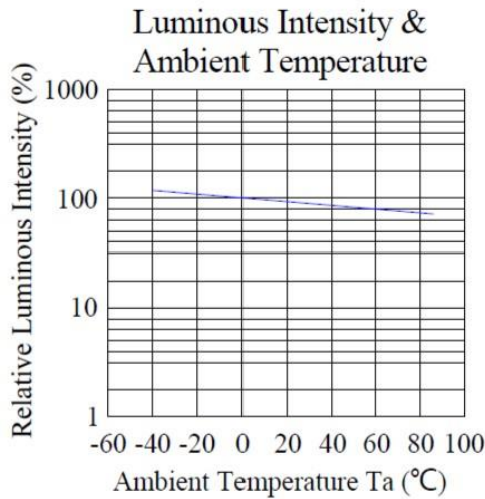
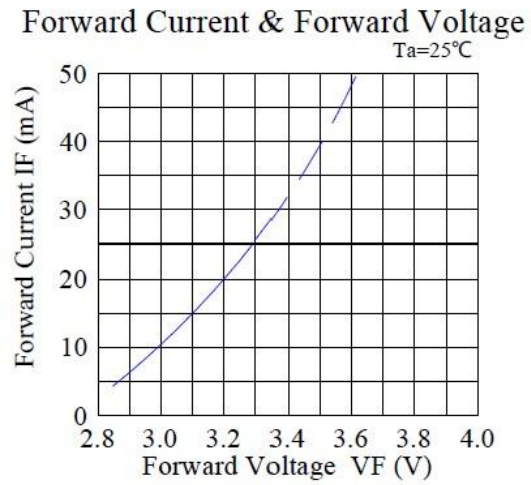
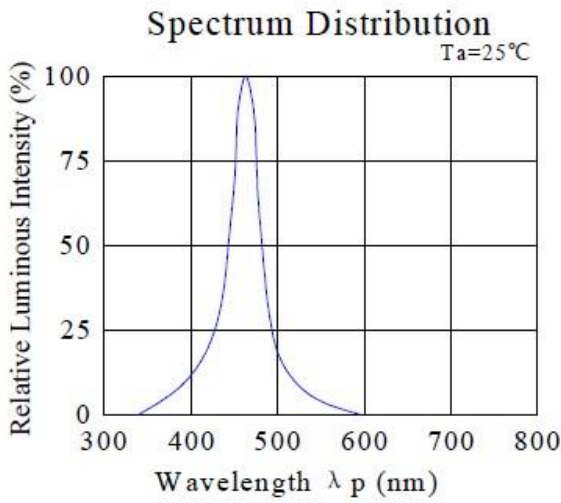
Typical Characteristic Curves – Yellow


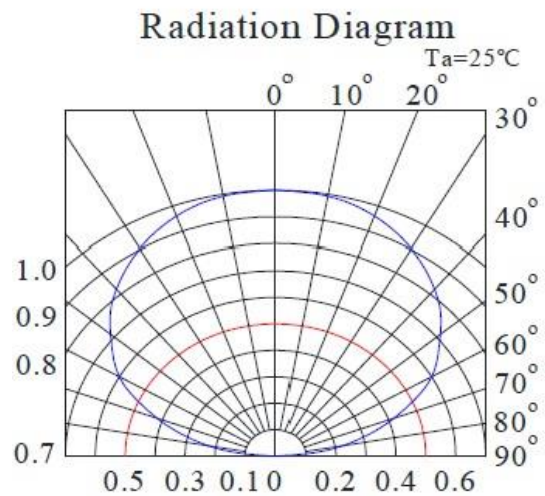
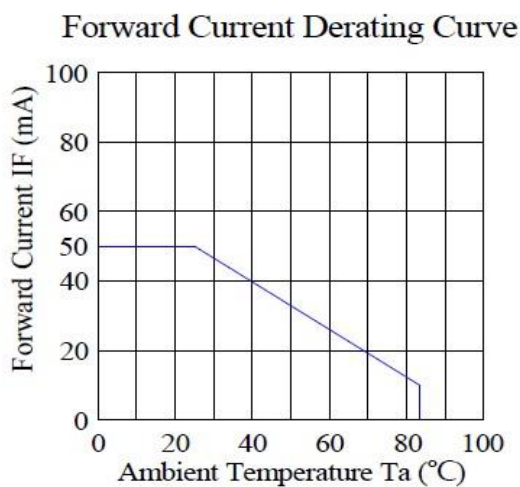
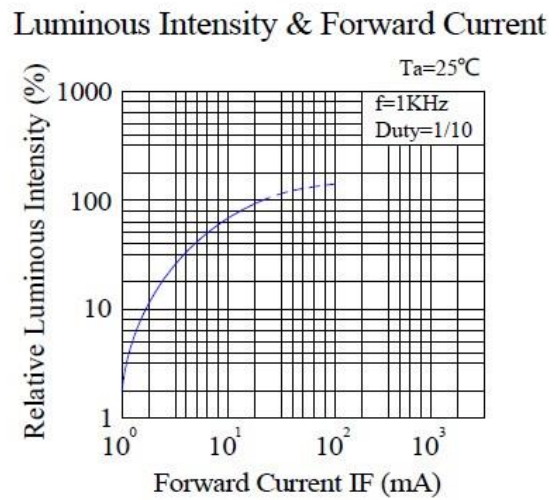
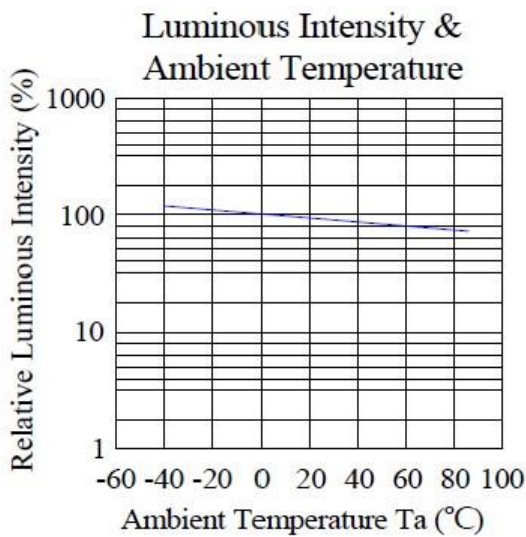
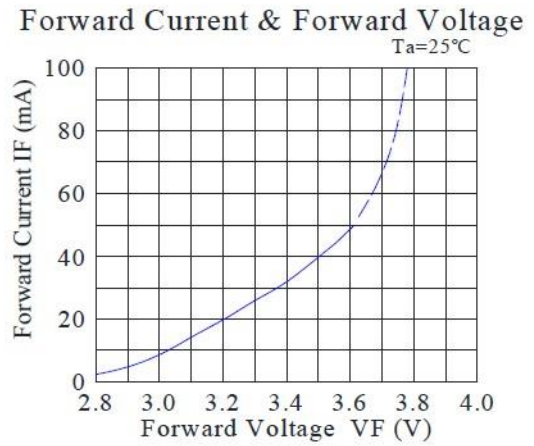
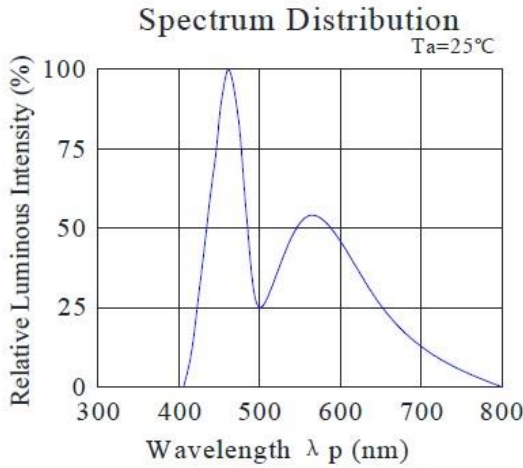
Typical Characteristic Curves – Amber


Typical Characteristic Curves – Red


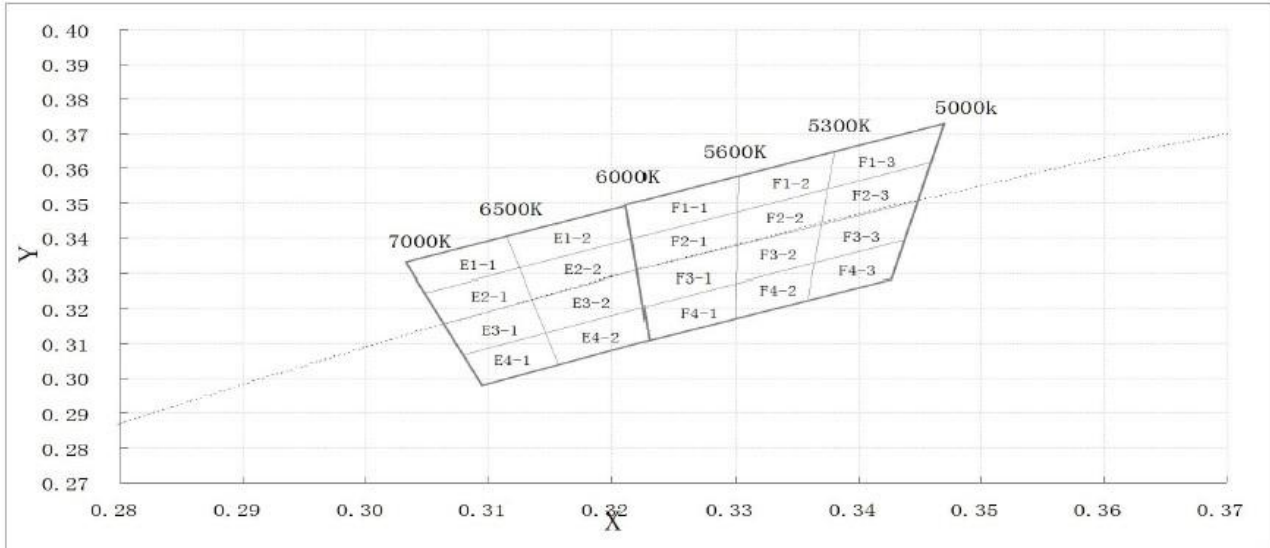
Typical Characteristic Curves – Cyan


Typical Characteristic Curves – Green


Typical Characteristic Curves – Blue


Typical Characteristic Curves – Cool White


Chromaticity Bin (For Cool White Only)



Bin Code	Left x	Left y	Top x	Top y	Right x	Right y	Bottom x	Bottom y
E1-1	0.305	0.324	0.313	0.331	0.312	0.341	0.303	0.333
E2-1	0.306	0.316	0.314	0.323	0.313	0.331	0.305	0.324
E3-1	0.308	0.307	0.315	0.313	0.314	0.323	0.306	0.316
E4-1	0.310	0.298	0.316	0.304	0.315	0.313	0.308	0.307
E1-2	0.313	0.331	0.323	0.340	0.323	0.349	0.312	0.341
E2-2	0.314	0.323	0.323	0.330	0.323	0.340	0.313	0.331
E3-2	0.315	0.313	0.323	0.321	0.323	0.330	0.314	0.323
E4-2	0.316	0.304	0.323	0.311	0.323	0.321	0.315	0.313
F1-1	0.323	0.340	0.330	0.347	0.330	0.357	0.323	0.349
F2-1	0.323	0.330	0.330	0.337	0.330	0.347	0.323	0.340
F3-1	0.323	0.321	0.330	0.327	0.330	0.337	0.323	0.330
F4-1	0.323	0.311	0.330	0.317	0.330	0.327	0.323	0.321
F1-2	0.330	0.347	0.337	0.354	0.338	0.365	0.330	0.357
F2-2	0.330	0.337	0.337	0.343	0.337	0.354	0.330	0.347
F3-2	0.330	0.327	0.337	0.333	0.337	0.343	0.330	0.337
F4-2	0.330	0.317	0.337	0.322	0.337	0.333	0.330	0.327
F1-3	0.337	0.354	0.346	0.362	0.347	0.373	0.338	0.365
F2-3	0.337	0.343	0.345	0.351	0.346	0.362	0.337	0.354
F3-3	0.337	0.333	0.344	0.340	0.345	0.351	0.337	0.343
F4-3	0.337	0.322	0.343	0.328	0.344	0.340	0.337	0.333



Notes

- Color Coordinates Measurement allowance is ± 0.01 .

Ordering Information

Product	Emission Color	Technology	Test Current I _F (mA)	Luminous Intensity I _v (mcd) (Typ.)	Forward Voltage V _F (V) (Typ.)	Orderable Part Number
INP-5A4Y120	Yellow	AllnGaP	20	500	2.0	INP-5A4Y120
INP-5A4A120	Amber	AllnGaP	20	500	2.0	INP-5A4A120
INP-5A4R120	Red	AllnGaP	20	500	2.0	INP-5A4R120
INP-5A4C120	Cyan	InGaN	20	700	3.2	INP-5A4C120
INP-5A4G120	Green	InGaN	20	800	3.2	INP-5A4G120
INP-5A4B120	Blue	InGaN	20	220	3.2	INP-5A4B120
INP-5A4W130.65	Cool White	InGaN	20	1000	3.2	INP-5A4W130.65

Label Specifications

		Date: yyyy/mm/dd
CUSTOMER P/N: 	INOLUX P/N: 	QTY: PCS
LOT NO: 	IV BIN: COLOR BIN: VF:	QC

Inolux P/N:

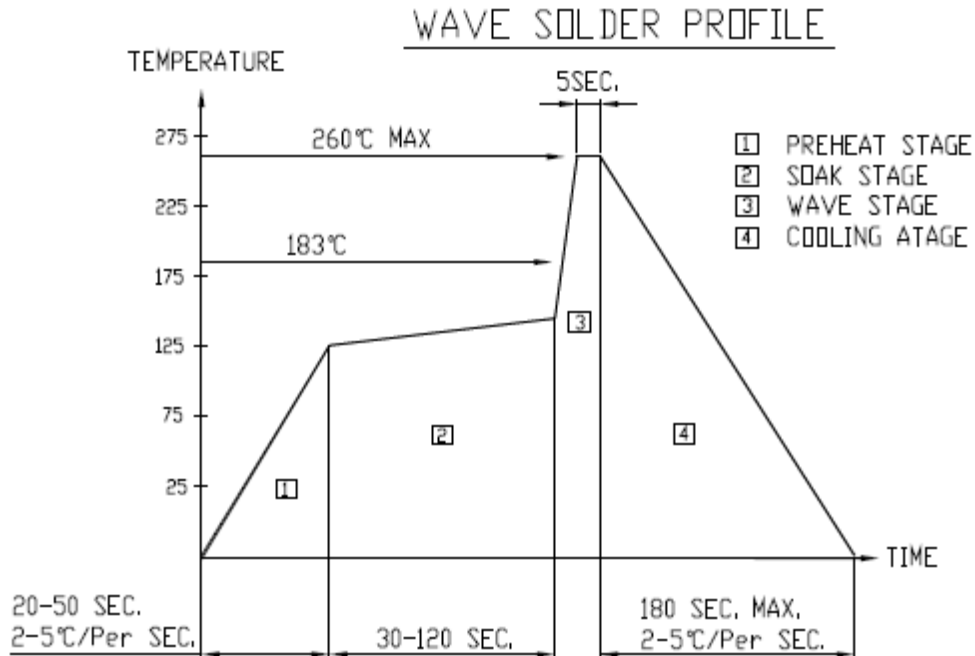
I	N	P	-	5	A	4	X	1	2	0	.65	-	X	X	X	X
Inolux Through Hole Piranha				Package	Lead Number	Color	View Angle			CCT	Customized Stamp-off					
				5 = 5mm dome 5A = Standard Variation	4 = 4 leads	Y: 590 nm A: 605 nm R: 624 nm C: 505 nm G: 525 nm B: 470 nm CW: X: 0.31 Y: 0.32	120 = 120 deg.			.65 = 6500k						

Lot No.:

Z	2	0	1	7	01	24	001
Internal Tracker	Year (2017, 2018,)				Month	Date	Serial

Soldering

Recommended soldering conditions:



Soldering Iron

Basic Spec is Max 3 sec. @ 300°C. Lamps without stopper must leave a min. of 3mm clearance from base of the lens to the soldering point.

Rework

Caution is advised when rework is performed. Rework should be completed within 4 second under 245°C using a double-headed soldering iron.

Reliability

Item	Frequency/ lots/ samples/ failures	Standards Reference	Conditions
Precondition	For all reliability monitoring tests according to JEDEC Level 2	J-STD-020	1.) Baking at 85°C for 24hrs 2.) Moisture storage at 85°C/ 60% R.H. for 168hrs
Solderability	1Q/ 1/ 22/ 0	JESD22-B102-B And CNS-5068	Accelerated aging 155°C/ 24hrs Tinning speed: 2.5+0.5cm/s Tinning: A: 215°C/ 3+1s or B: 260°C/ 10+1s
Resistance to soldering heat		CNS-5067	Dipping soldering terminal only Soldering bath temperature A: 260+/-5°C; 10+/-1s B: 350+/-10°C; 3+/-0.5s
Operating life test	1Q/ 1/ 40/ 0	CNS-11829	1.) Precondition: 85°C baking for 24hrs 85°C/ 60%R.H. for 168hrs 2.) Tamb25°C; IF=20mA; duration 1000hrs
High humidity, high temperature bias	1Q/ 1/ 45/ 0	JESD-A101-B	Tamb: 85°C Humidity: 85% R.H., IF=5mA Duration: 1000hrs
High temperature bias	1Q/ 1/ 20	IN specs.	Tamb: 55°C IF=20mA Duration: 1000hrs
Pulse life test	1Q/ 1/ 40/ 0		Tamb25°C, If=20mA,, Ip=100mA, Duty cycle=0.125 (tp=125 μs, T=1sec) Duration 500hrs)
Temperature cycle	1Q/ 1/ 76/ 0	JESD-A104-A IEC 68-2-14, Nb	A cycle: -40 degree C 15min; +85 degree C 15min Thermal steady within 5 min.. 300 cycles 2 chamber/ Air-to-air type
High humidity storage test	1Q/ 1/ 40/ 0	CNS-6117	60+3°C 90+5/-10% R.H. for 500hrs
High temperature storage test	1Q/ 1/ 40/ 0	CNS-554	100+10°C for 500hrs
Low temperature storage test	1Q/ 1/ 40/ 0	CNS-6118	-40+5°C for 500hrs

Revision History

Changes since last revision	Page	Version No.	Revision Date
Initial Release		1.0	06-18-2020

DISCLAIMER

INOLUX reserves the right to make changes without further notice to any products herein to improve reliability, function or design. INOLUX does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

INOLUX's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of INOLUX or INOLUX CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.