



INOLUX

**LED
DESIGN
MADE
SIMPLE**




IN-PI31TAS5R5G5B

Product Announcement

IN-PI31TAS5R5G5B LEDs are 3512 package side-view RGB devices with built-in IC. These compact, low-power consumption LEDs can create millions of color combinations while offering data transfer rates of 800 kbp/s at 30 frames per second, making them the ideal choice for endless designs. Typical (R/G/B) wavelengths are 625/525/465nm with a luminous intensity range of 80-160/320-580/60-120mcd.

For more information, contact us at:
sales@inolux-corp.com

Package (mm)	Current R/G/B (mA)
31TA = 3.5 x 1.25 x 1.55	5/5/5

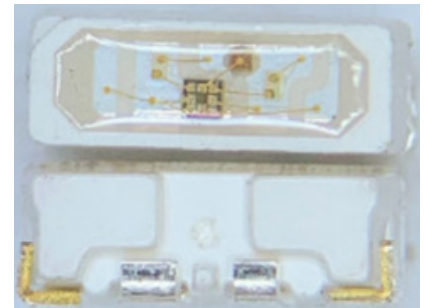

RoHS and Reach compliant to ensure product designs meet the needs of consumers and regulations on a global level.

