

Features

- High infrared radiant intensity
- Peak emission wavelength of 1055 nm
- Compact surface-mount package
- High reliability and stable optical performance
- Compatible with automated placement and reflow soldering processes

Applications


- Infrared sensing systems
- Optical detection modules
- Industrial automation sensors
- Optical measurement equipment
- Infrared communication systems

Description

The IN-S11TZTKUSWIR.1055 is a short-wave infrared emitting diode designed to provide high radiant output with a peak emission wavelength of 1055 nm.

The device is packaged in a compact surface-mount package suitable for automated assembly processes. It delivers stable optical performance and high reliability, making it suitable for a wide range of infrared sensing and detection applications

Package Dimensions in mm

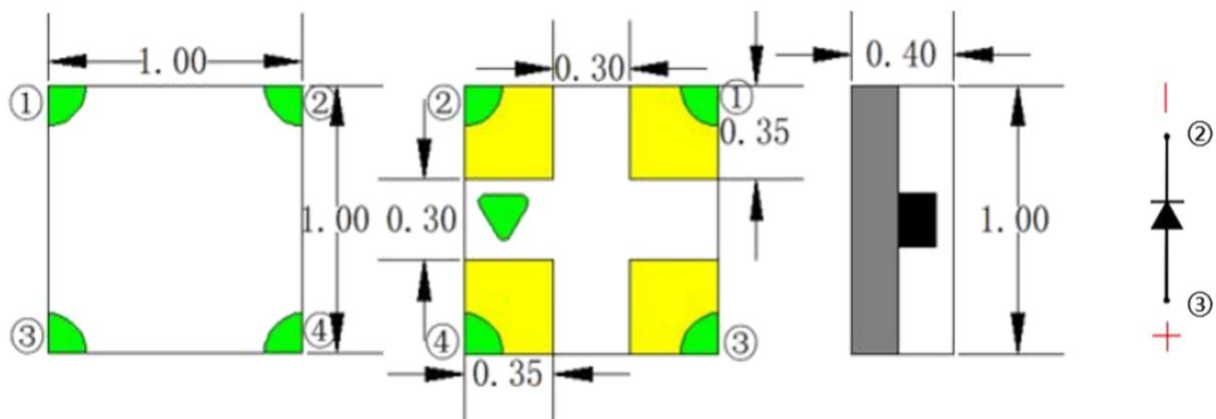

Notes

1. All dimensions are in millimeters.
2. Tolerance is ± 0.1 mm unless otherwise noted

Absolute Maximum Rating $T_A=25^{\circ}\text{C}$

Parameter	Symbol	Ratings	Unit
Power Dissipation	Pd	100	mW
Reverse Voltage	VR	5	V
Forward Current	IF	≤100	mA
Peak Forward Current*1	IFP	100	mA
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+85	°C
Soldering Temperature*2	Tsol	245	°C

Notes

1. Pulse width ≤ 100μs, Duty cycle = 10%.
2. 2mm from body for 5 seconds.

ESD Precaution

ATTENTION: Electrostatic Discharge (ESD) protection



The symbol above denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are STATIC SENSITIVE devices. ESD precaution must be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Please be advised that normal static precautions should be taken in the handling and assembly of this device to prevent damage or degradation which may be induced by electrostatic discharge (ESD).

Electro-Optical Characteristics $T_A=25^{\circ}\text{C}$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous intensity	I_e	IF=20mA	--	1.6	--	mW/sr
Peak Wavelength	λ_p	IF=20mA	--	1055	--	nm
Dominant Wavelength	λ_d	IF=20mA	1030	--	1065	nm
Forward Voltage	VF	IF=20mA	1.0	--	1.3	V
Reverse Current	IR	VR=5V	--	--	10	μA
View Angle	$2\theta_{1/2}$	IF=20mA	--	120	--	deg

Revision History

Changes since last revision	Page	Version No.	Revision Date
Preliminary version		0.1	03-11-2026

DISCLAIMER

INOLUX reserves the right to make changes without further notice to any products herein to improve reliability, function or design. INOLUX does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

INOLUX's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of INOLUX or INOLUX CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.