

**Inolux Technologies 0.51" Triple Digit Numeric SMD Display
HNST51 Series**

Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 1/18

DISCLAIMER	3
ORDERABLE INFORMATION	4
FEATURES	5
SCHEMATIC DRAWING	6
PRODUCT CHARACTERISTIC	7
ABSOLUTE MAXIMUM RATING	7
ELECTRICAL AND OPTICAL CHARACTERISTIC	8
RECOMMENDED SOLDER FOOTPRINT	9
CHARACTERISTIC CURVES FOR UB	10
CHARACTERISTIC CURVES FOR TG	11
CHARACTERISTIC CURVES FOR TW	12
CHARACTERISTIC CURVES FOR UYG	13
CHARACTERISTIC CURVES FOR UY	14
CHARACTERISTIC CURVES FOR UA	15
CHARACTERISTIC CURVES FOR UR	16
CHARACTERISTIC CURVES FOR USR	17
REFLOW SOLDERING	18
SOLDERING IRON	18
REWORK	18
REVISION HISTORY	19

Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 2/18

DISCLAIMER

- The information contained herein is presented only as a guide for the applications of our products.

No responsibility is assumed by INOLUX for any infringements of intellectual property or other rights of the third parties which may result from its use.

- Inolux is continually effort to improve the quality of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing INOLUX products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such INOLUX products cause loss of human life, bodily injury or damage to property.
- The INOLUX products listed in this document are intended for usage in general electronics (computer, personal equipment, office equipment, industrial robotics, domestic, etc...) These products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury.
- In developing your designs, please ensure that INOLUX products are used within specified operating ranges as set forth in the most recent INOLUX products specifications.
- Also, please keep in mind the precautions listed in this document.

Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 3/18


Orderable Information

H	N	S	T	51	X	X	X	-	X	X	X	X
↓		↓		↓	↓			↓	↓			
Series Name		Digit Height	Color Code				Polarity	Customer Code				
HNST H: Inolux Technologies N: Numeric S: SMD Display T: Triple Digit		51: 0.51” Digit Height	UB: 470nm InGaP Blue TG: 525nm InGaP True Green TW: InGaP White UYG: 570nm AlInGaP Yellow Green UY: 590nm AlInGaP Yellow UA: 610nm AlInGaP Amber UR: 625nm AlInGaP Hyper Red USR: 640nm AlInGaP Super Red				A: Common Anode C: Common Cathode	XXXX: Customer specific code				

Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 4/18

Features


- 0.51" (13.0mm) Digit Height
- SMD Type Display
- Gray Face , White Segment
- RoHS Compliant, Pb Free

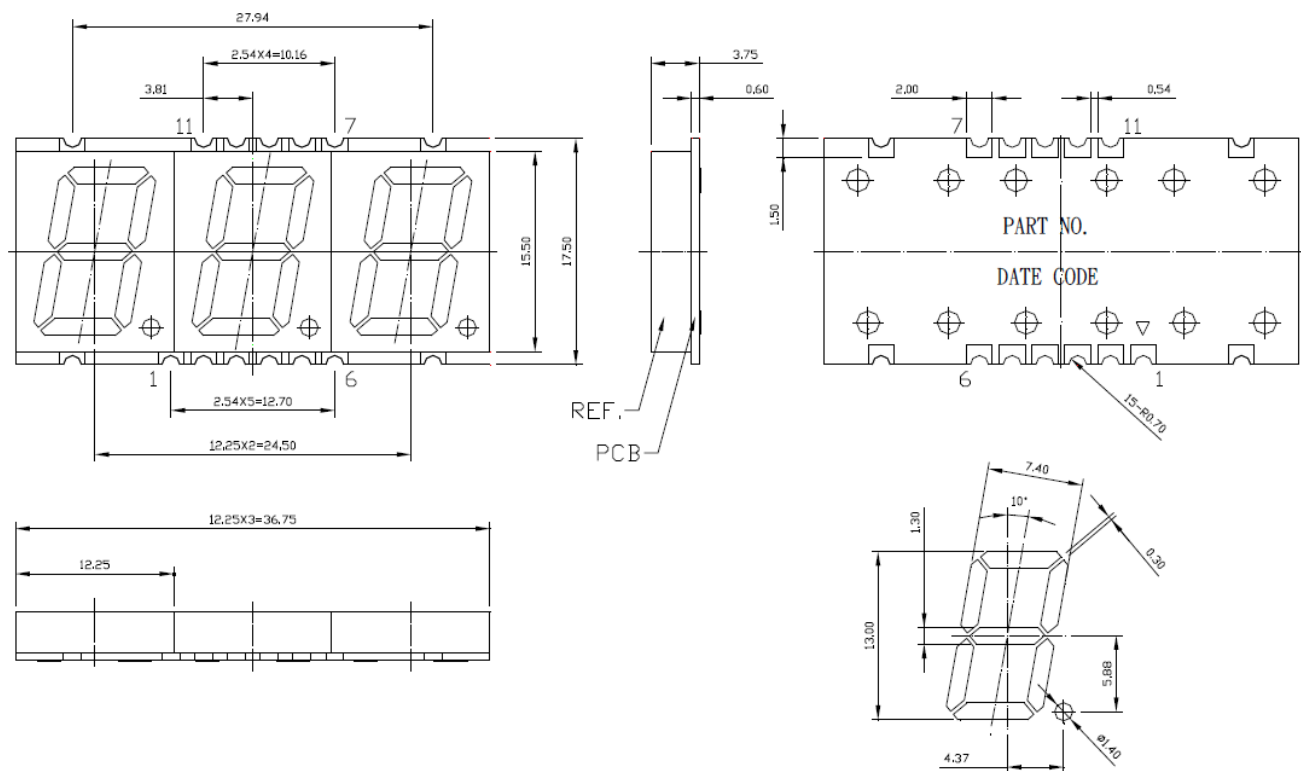

Note: Dimension is in millimeters. Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted.

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 5/18

Schematic Drawing

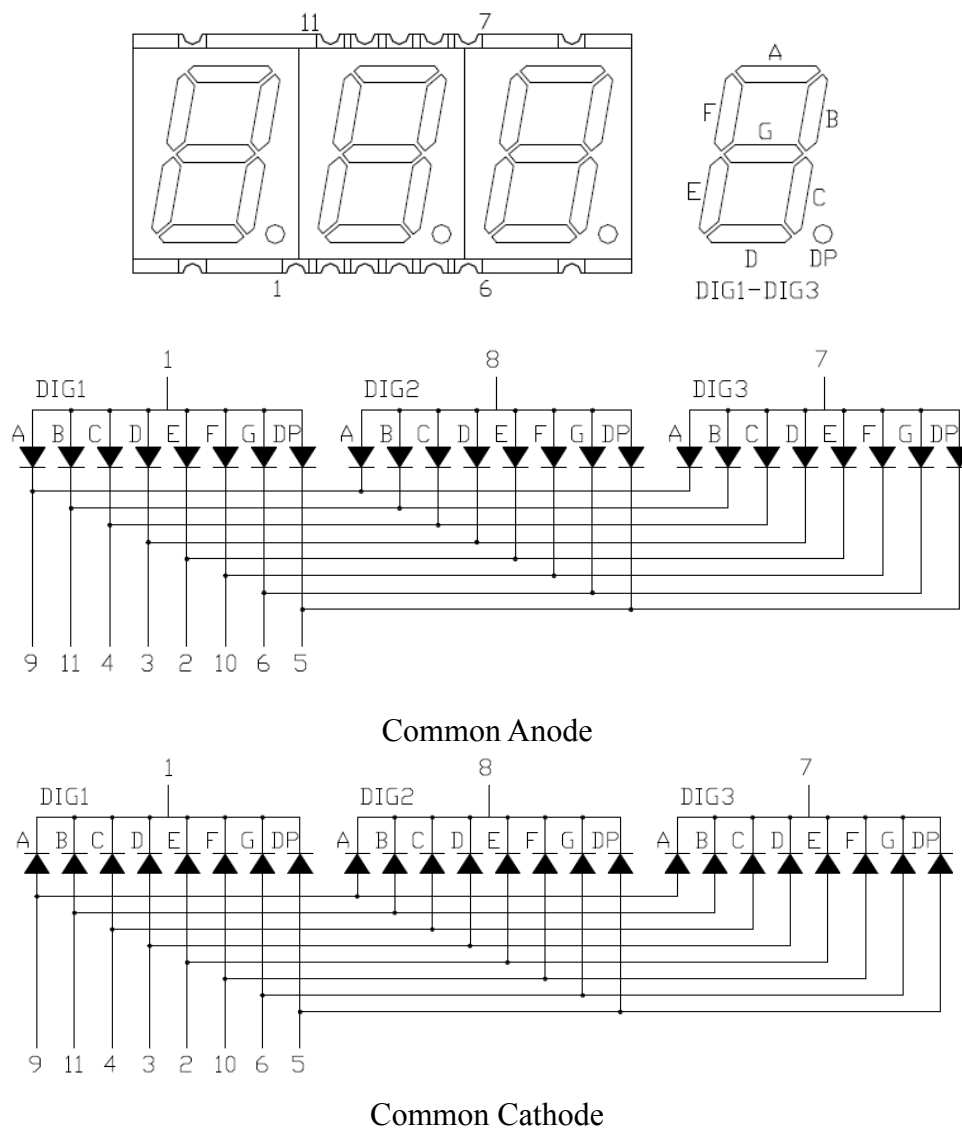

Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 6/18

Product Characteristic

Absolute Maximum Rating

(T_a = 25°C)

Product	Emission Color	P _{AD} (mW)	I _{AF} (mA)	I _{PF} (mA)	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	Derate From 25°C (mA/°C)
HNST51UBA/ HNST51UBC	Blue	120	30	100	5	-40 ~ +105	-40 ~ +105	0.3
HNST51TGA/ HNST51TGC	True Green	120	30	100	5	-40 ~ +105	-40 ~ +105	0.3
HNST51TWA/ HNST51TWC	White	120	30	100	5	-40 ~ +105	-40 ~ +105	0.3
HNST51UYGA/ HNST51UYGC	Yellow Green	70	25	90	5	-40 ~ +105	-40 ~ +105	0.28
HNST51UYA/ HNST51UYC	Yellow	70	25	90	5	-40 ~ +105	-40 ~ +105	0.28
HNST51UAA/ HNST51UAC	Amber	70	25	90	5	-40 ~ +105	-40 ~ +105	0.28
HNST51URA/ HNST51URC	Hyper Red	70	25	90	5	-40 ~ +105	-40 ~ +105	0.28
HNST51USRA/ HNST51USRC	Super Red	75	30	100	5	-40 ~ +105	-40 ~ +105	0.3


Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 7/18

Electrical and Optical Characteristic
 $(T_a = 25^{\circ}\text{C})$

Product	Emission Color	I_F (mA)	V_F (V)		λ (nm)		I_V (mcd)	I_R (μA)
			Typ.	Max.	λ_d	$\Delta\lambda$	Typ.	Max
HNST51UBA/ HNST51UBC	Blue	20	3.2	4.0	470	30	40	10 ($V_R=8\text{V}$)
HNST51TGA/ HNST51TGC	True Green	20	3.2	4.0	525	30	170	10 ($V_R=8\text{V}$)
HNST51TWA/ HNST51TWC	White	5	3.2	4.0	X=0.29 Y=0.29	30	120	10 ($V_R=8\text{V}$)
HNST51UYGA/ HNST51UYGC	Yellow Green	20	2.1	2.6	570	20	12	10 ($V_R=5\text{V}$)
HNST51UYA/ HNST51UYC	Yellow	20	2.0	2.6	590	20	30	10 ($V_R=5\text{V}$)
HNST51UAA/ HNST51UAC	Amber	20	2.0	2.6	610	20	30	10 ($V_R=5\text{V}$)
HNST51URA/ HNST51URC	Hyper Red	20	2.0	2.6	625	20	30	10 ($V_R=5\text{V}$)
HNST51USRA/ HNST51USRC	Super Red	20	2.0	2.6	640	20	6	10 ($V_R=5\text{V}$)

Luminous Intensity tolerance = +/- 15%

Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 8/18

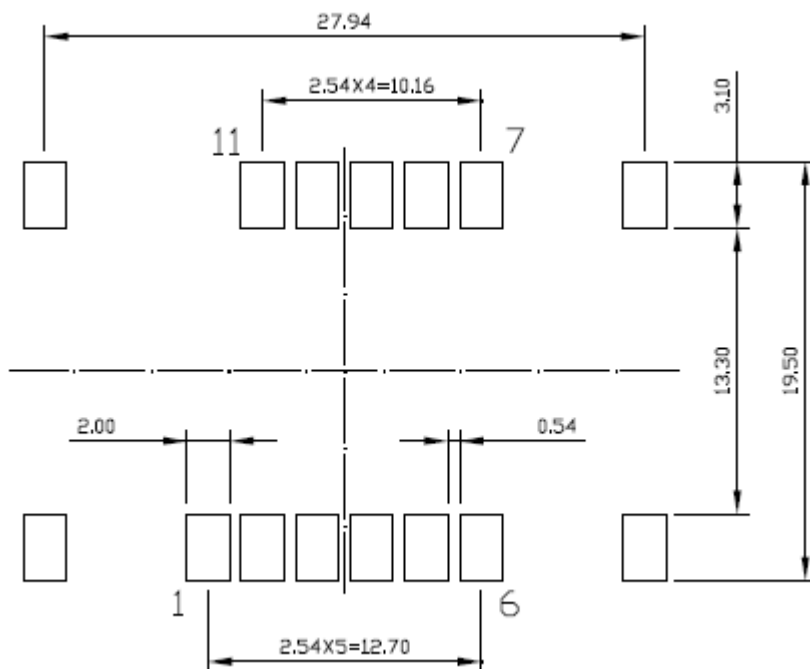Recommended Solder Footprint


Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 9/18

Characteristic Curves for UB

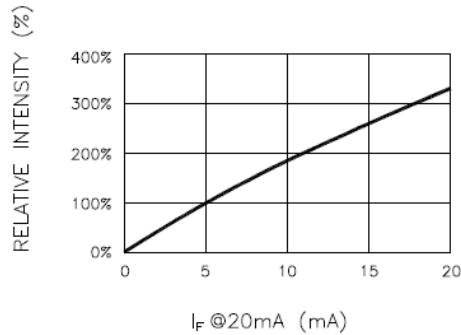


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

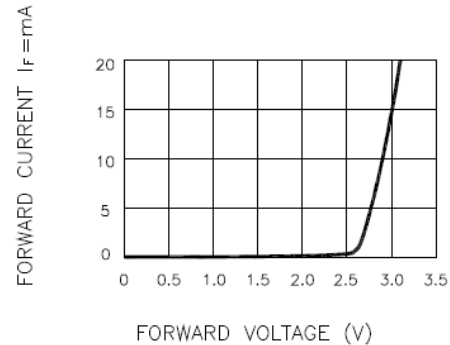


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

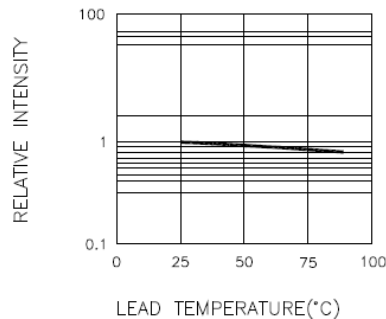


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

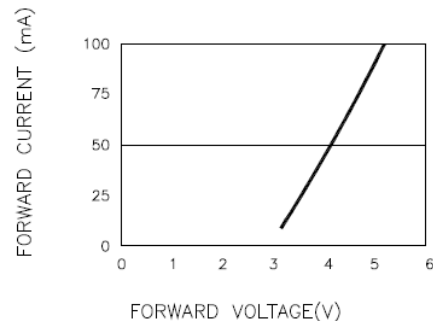


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD
(100us TEST PULSE, 1% DUTY CYCLE)

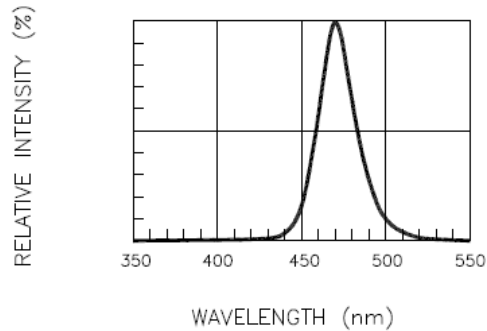


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH







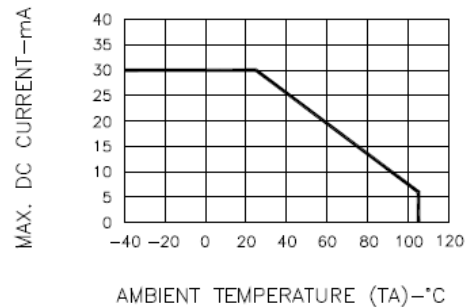


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 10/18

Characteristic Curves for TG

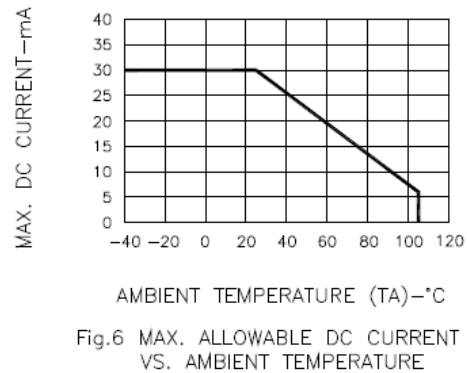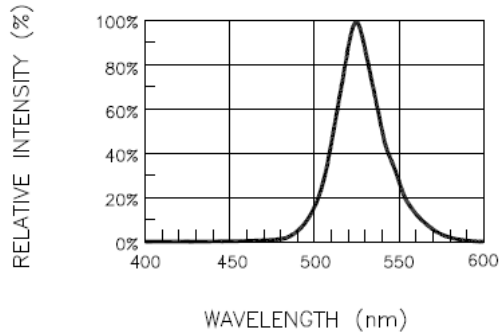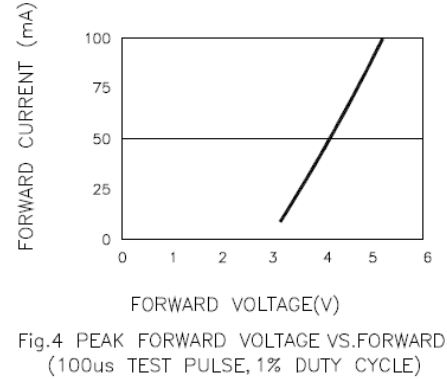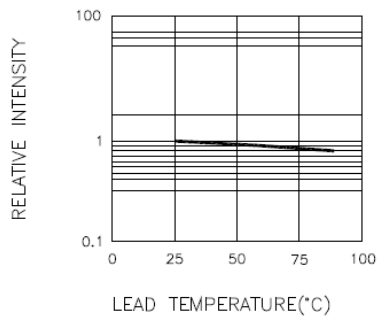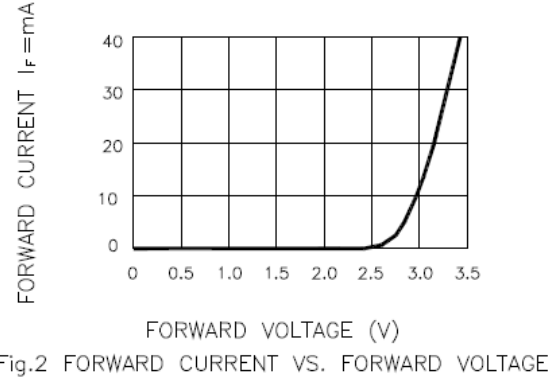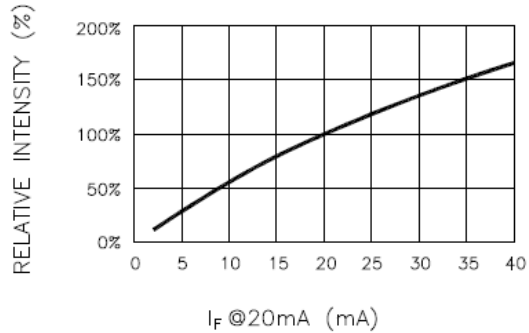

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	May 14, 2013	Version of 1.0	Page 11/18

Characteristic Curves for TW

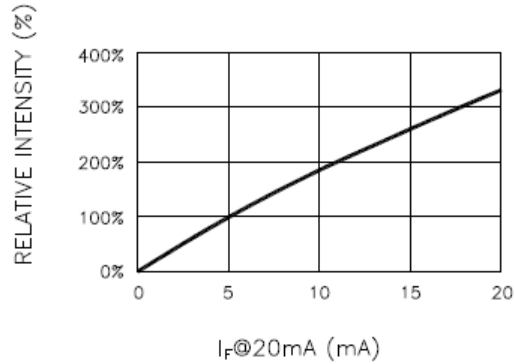


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

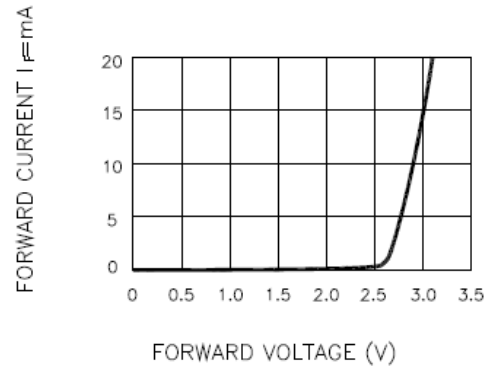


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

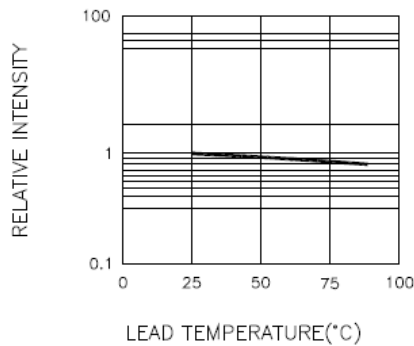


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

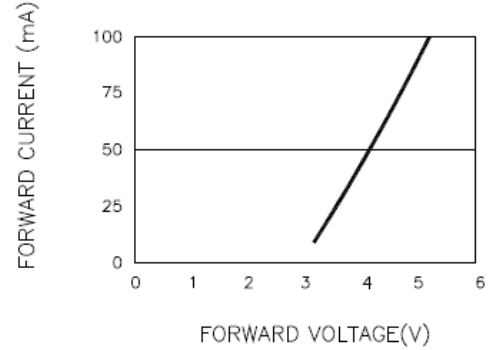


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD CURRENT
(100us TEST PULSE, 1% DUTY CYCLE)

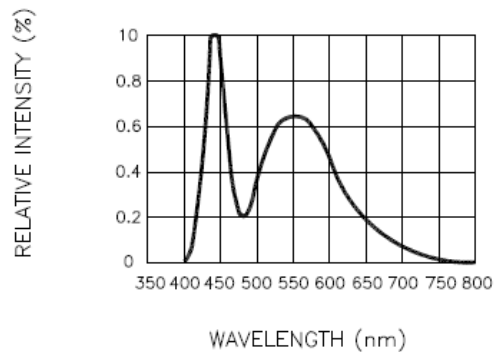


Fig.4 RELATIVE INTENSITY VS. WAVELENGTH

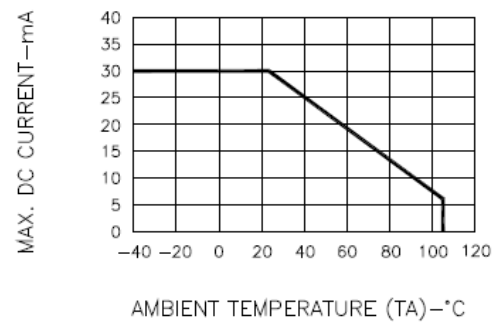


Fig.7 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 12/18

Characteristic Curves for UYG

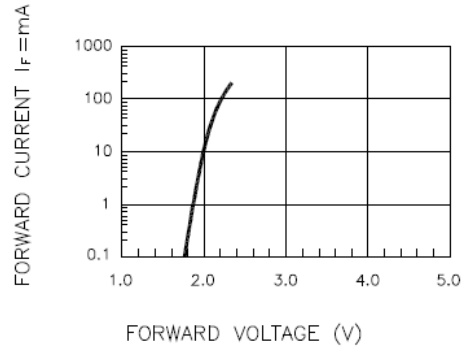


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

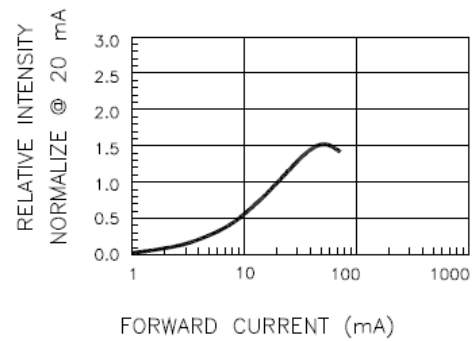


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

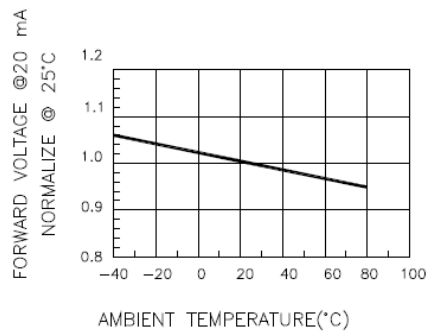


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

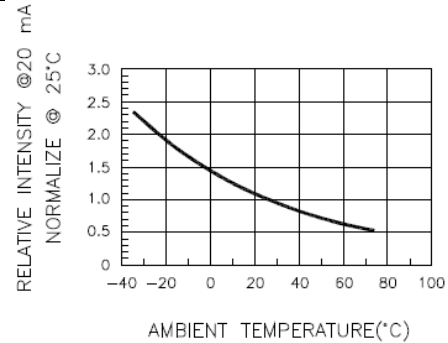


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

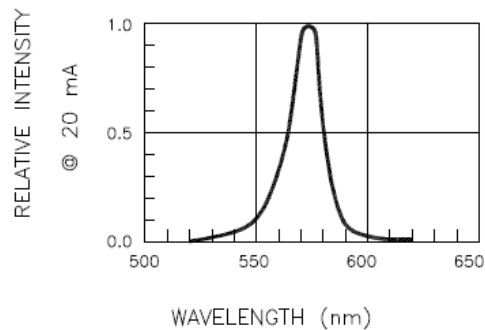


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

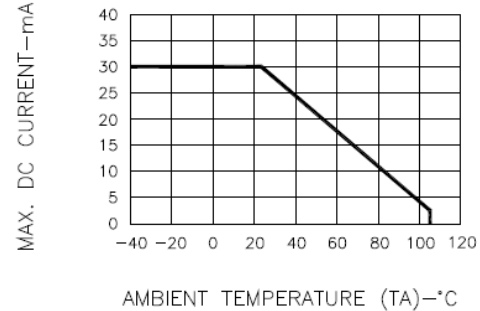


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Page 13/18

Characteristic Curves for UY

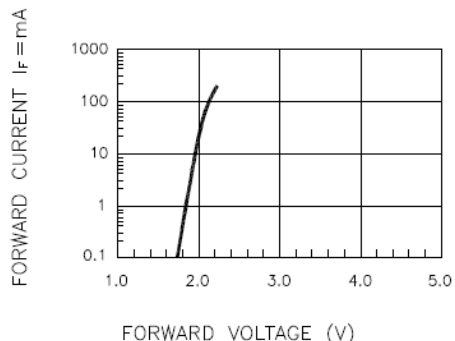


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

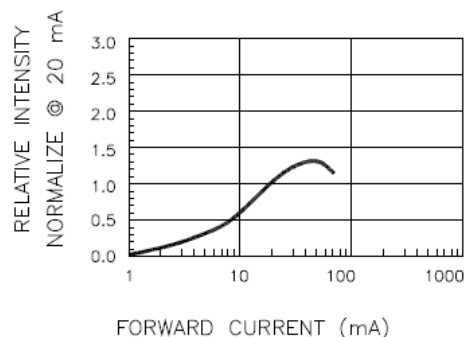


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

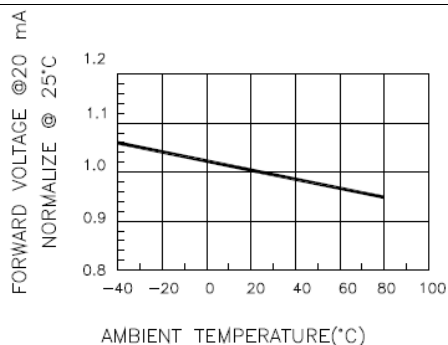


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

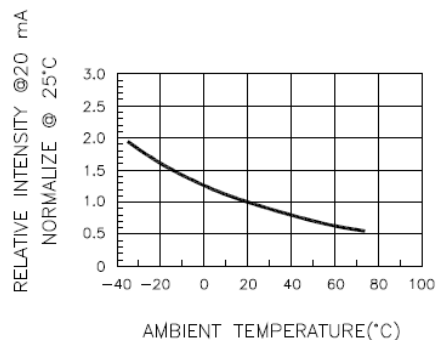


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

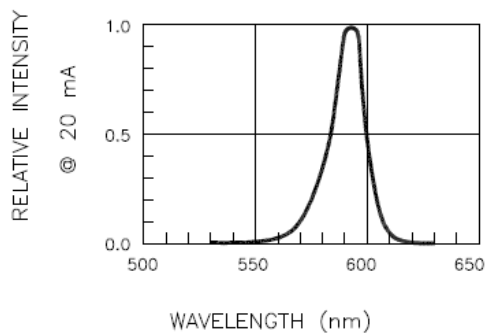


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

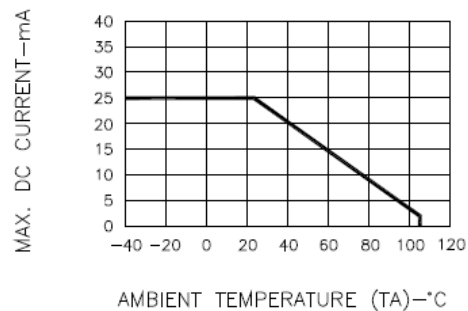


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 14/18

Characteristic Curves for UA

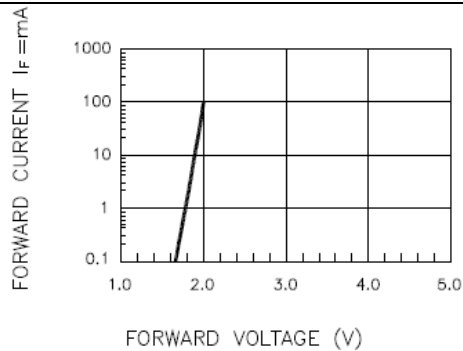


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

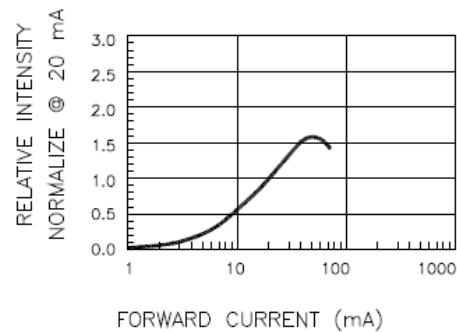


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

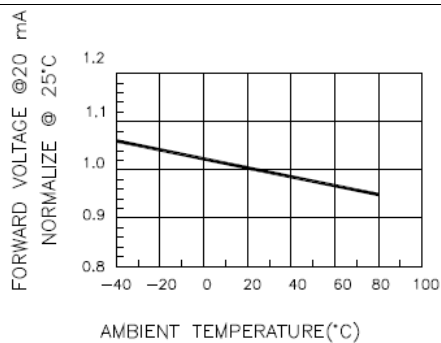


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

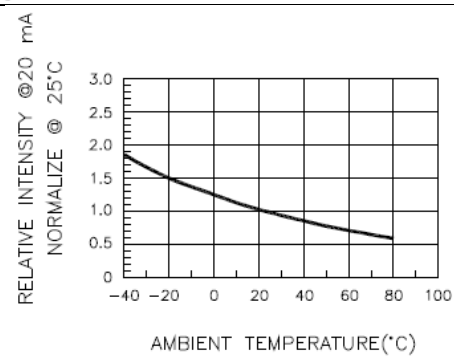


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

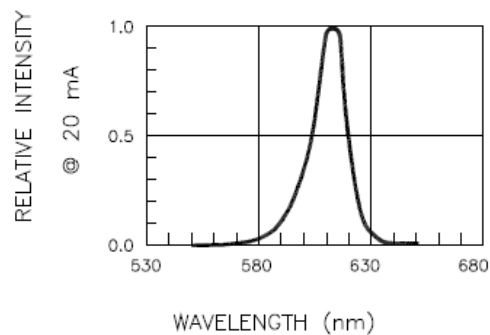


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

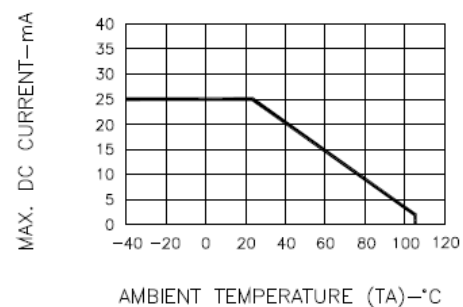


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 15/18

Characteristic Curves for UR

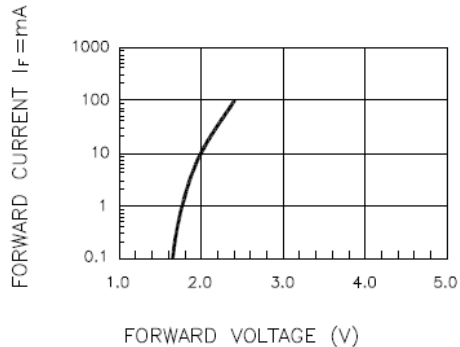


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

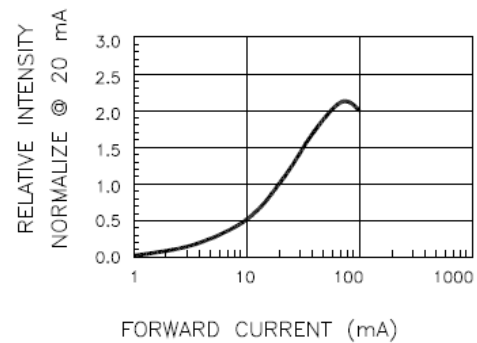


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

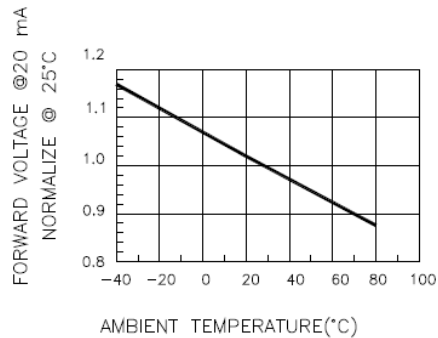


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

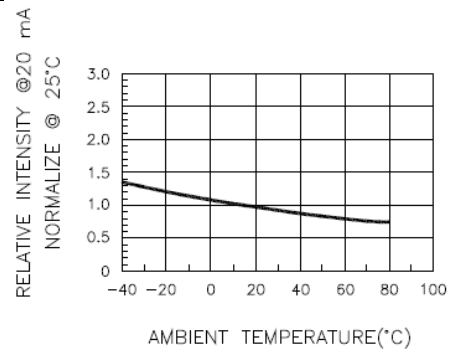


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

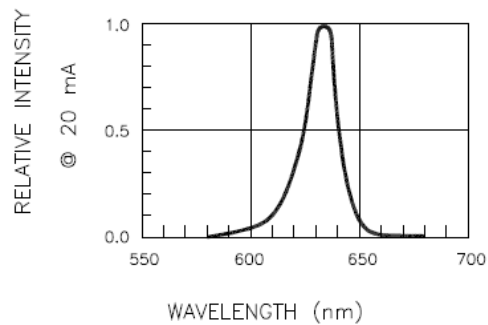


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

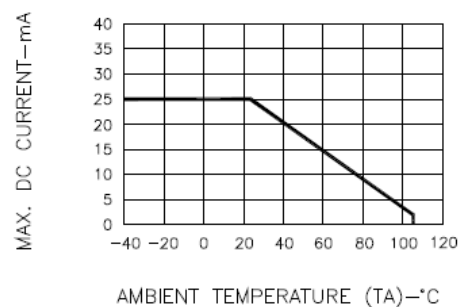


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 16/18

Characteristic Curves for USR

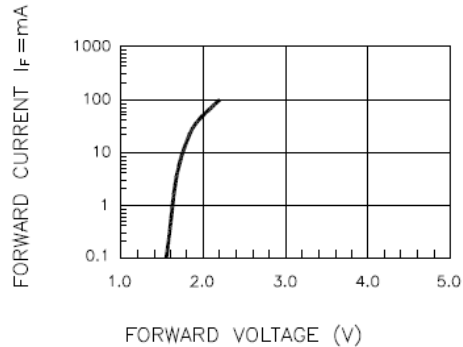


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

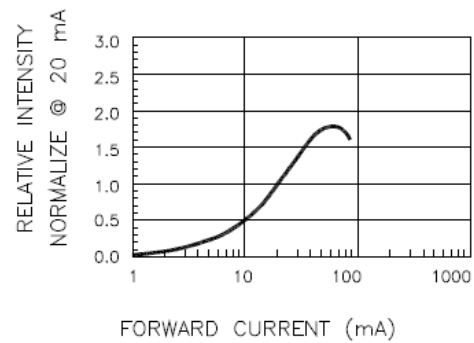


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

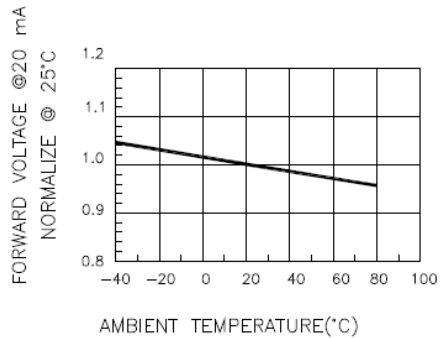


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

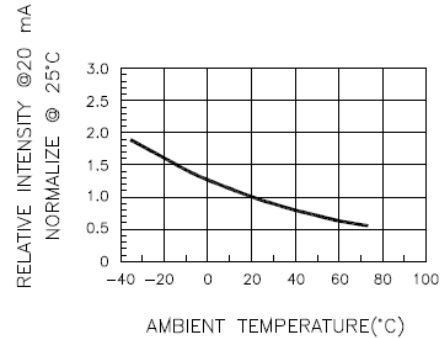


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

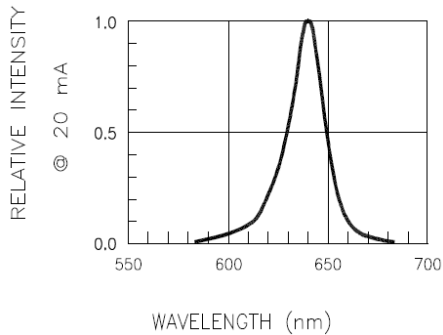


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


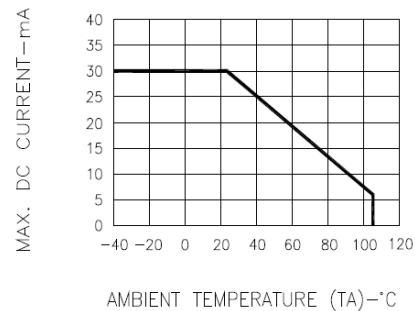


Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 17/18

Reflow Soldering

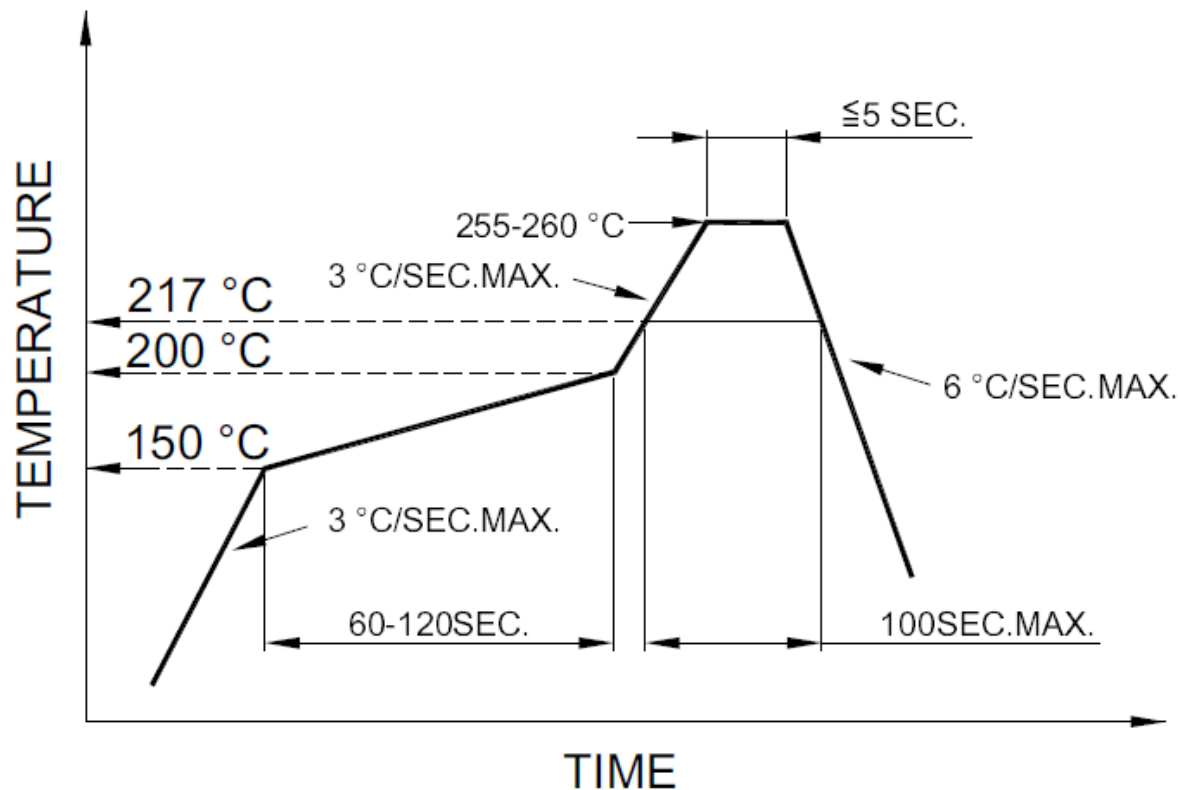

Pb Free Reflow Soldering Profile

Soldering Iron

Basic Spec is ≤ 4 sec. when 260°C (+10°C $\rightarrow$ -1 second). Power dissipation of Iron should be less than 15W. Surface temperature should be under 230°C

Rework

Rework should be completed within 3 second under 350°C

Official Product	HNST51 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0	Page 18/18

Revision History

Changes since last revision	Page	Version No.	Revision Date
Initial Release for HNST51		1.0	05-14-2013

Official Product	HNST51 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNST51 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 14, 2013	Version of 1.0
			Page 19/18